


CPW-WAVEGUIDE CONVERTER SUBSTRATE

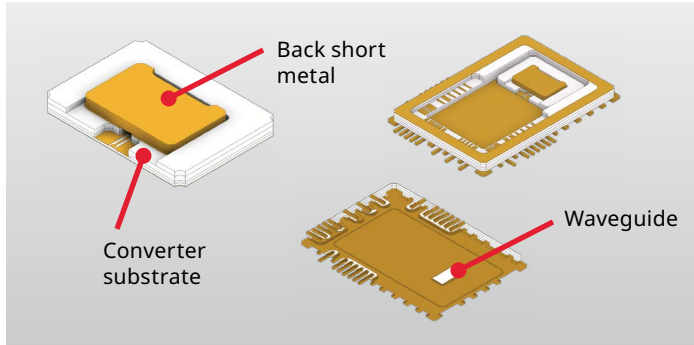

APPLICATIONS

- ▶ Point-to-point communication
- ▶ Radar

FEATURES

- ▶ Electrical performance (70~86 GHz)
 - Return loss: < -10.0 dB
 - Insertion loss: > -1.0 dB
- ▶ Convert CPW to WR12 waveguide
- ▶ Hermetic structure available
- ▶ Test kit available

RF PERFORMANCE

